

# H.264 HC SERIES DVR BUILT-IN DVD±RW



DVR







## FEATURE

- True H.264 compression and up to D1 (max. 720x480 / 720x576) resolution
- Pentaplex operation: live, recording, playback, backup & remote access
- Free DDNS server for use with dynamic IP address
- Multiple backup for Thumb Drive / USB CD-RW, DVD±RW / USB HDD, network download and built-in DVD-RW



- Free 64ch Central Management Software (CMS) allows viewing of 512 channels on a PC
- Multiple language OSD
- Per channel configuration
- Remote view support iPhone, BlackBerry, Windows / Symbian based mobile phone

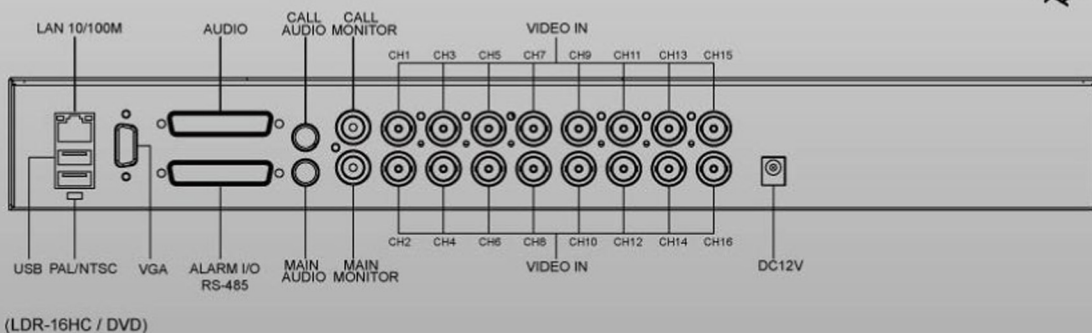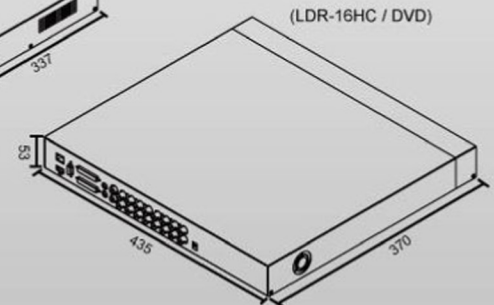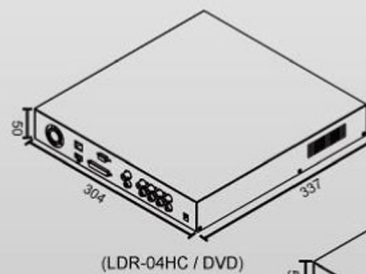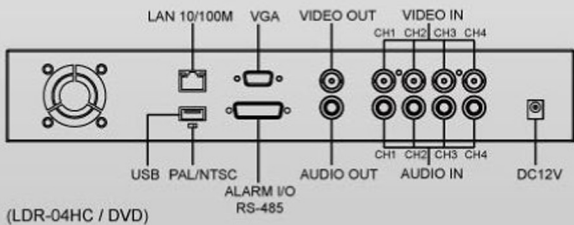

# H.264 HC SERIES DVR BUILT-IN DVD±RW

DVR

Model No.	CDR-04HC/DVD	CDR-08HC/DVD	CDR-16HC/DVD	
Compression Format	H.264			
Operation Mode	Pentaplex			
Video	Camera Input	BNC x 4	BNC x 8	BNC x 16
	Output Main Monitor	BNC x 1		
	Output Call Monitor	None	BNC x 1	
	VGA Output	800x600 / 1024x768 / 1280x1024 60HZ		
	Display Image	PAL: 720x576 / NTSC: 720x480		
	Display Rate	PAL: 100FPS / NTSC: 120FPS	PAL: 200FPS / NTSC: 240FPS	PAL: 400FPS / NTSC: 480FPS
	Digital Zoom	Yes		
Audio	Input	RCA x 4	D-SUB x 8	D-SUB x 16
	Main Output	RCA x 1		
	Call Output	None	RCA x 1	
Recording	Resolution (PAL)	25PPS / 720x576 pixel 50PPS / 720x288 pixel 100PPS / 360x288 pixel	50PPS / 720x576 pixel 100PPS / 720x288 pixel 200PPS / 360x288 pixel	
	Resolution (NTSC)	30PPS / 720x480 pixel 60PPS / 720x240 pixel 120PPS / 360x240 pixel	60PPS / 720x480 pixel 120PPS / 720x240 pixel 240PPS / 360x240 pixel	
	Mode	Manual / Alarm / Schedule / Motion / Easy Recording		
	Quality	8 levels		
	Data Life Time	Yes		
Storage	Media	Max. 1 x SATA HDD Disk	Max. 1 x SATA HDD Disk	Max. 1 x SATA HDD Disk
	Built-in device	1 x DVD±RW		
	Backup	1 x USB 2.0 Port support Thumb Drive / USB CD-RW, DVD±RW / USB HDD, network download and built-in DVD±RW		
Alarm	Input / Output	4 x D-Sub / 1 x D-Sub	8 x D-Sub 2 x D-Sub	16 x D-Sub / 2 x D-Sub
	Motion Detection	16x12 Grid Array, Sensitivity, Trigger Level programmable		
	Video Loss Detection	Yes		
Communication	Network	Ethernet RJ-45, 10/100/1000Mbps, support PPPoE, TCP/IP, DHCP, DDNS		
	Remote Operation	Monitor, Playback, Recording, System Setup, Speedome Camera, Archive		
	I/O Port	RS-485 (Pelco P, Pelco D, Dynacolor, Panasonic, JVC)		
	Control Interface	IE Browser, Mouse, IR remote control, Front panel button		
Others	Power	DC12V/5A	DC12V/5A	
	Dimension (mm)	335x305x45	435x375x60	
	Weight (kgs)	Appro.3.1 / 2pcs per carton	Appro.5.5 / 2pcs per carton	
	Operation Temperature	0~60 degC		
	Humidity	10~90%		

